



PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification⁶: B32B 27/10, B65D 65/40	A1	(11) International Publication Number: WO 97/13639 (43) International Publication Date: 17 April 1997 (17.04.97)
(21) International Application Number: PCT/SE96/01237 (22) International Filing Date: 2 October 1996 (02.10.96) (30) Priority Data: 9503494-8 9 October 1995 (09.10.95) SE (71) Applicant (for all designated States except US): TETRA LAVAL HOLDINGS & FINANCE S.A. [CH/CH]; 70, avenue Général-Guisan, CH-1009 Pully (CH). (72) Inventors; and (75) Inventors/Applicants (for US only): BENTMAR, Mats [SE/SE]; Hästhovsgatan 8, S-233 37 Svedala (SE). BERLIN, Mikael [SE/SE]; Fjellievägen 13B, 4 vån., S-227 36 Lund (SE). (74) Agent: SUNDELL, Håkan; AB Tetra Pak, Patent Dept., Ruben Rausing's gata, S-221 86 Lund (SE).		(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>

(54) Title: A PACKAGING LAMINATE AND A METHOD OF PRODUCING THE PACKAGING LAMINATE, AND A PACKAGING CONTAINER PRODUCED FROM THE PACKAGING LAMINATE AND POSSESSING SUPERIOR OXYGEN GAS BARRIER PROPERTIES

(57) Abstract

The disclosure relates to a laminated packaging material (10) comprising a layer (14) of polyvinyl alcohol which serves as oxygen gas barrier and which is applied on one side of a core layer (11) of paper or paper-board. In order to reduce the quantity employed of polyvinyl alcohol in the laminated packaging material (10), a layer (15) of plastic acting as binder is applied between the core layer (11) and the polyvinyl alcohol layer (14), this plastic layer contributing in evening out the otherwise coarse surface of the fibre layer (11) at the same time as forming an effective barrier against the penetration of polyvinyl alcohol into this layer. By the applied plastic layer (15), and an additional layer (13) of plastic applied onto the polyvinyl alcohol layer (14), the polyvinyl alcohol layer (14) will be encapsulated and well protected against moisture and wet in the finished packaging material (10).

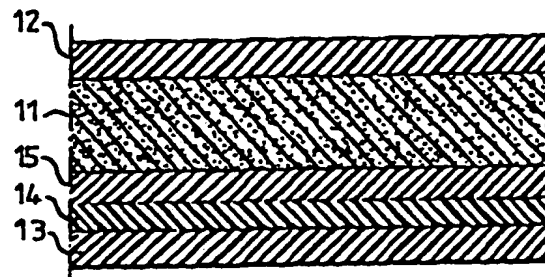

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

**A PACKAGING LAMINATE AND A METHOD OF PRODUCING THE
PACKAGING LAMINATE, AND A PACKAGING CONTAINER
PRODUCED FROM THE PACKAGING LAMINATE AND POSSESSING
SUPERIOR OXYGEN GAS BARRIER PROPERTIES**

5

TECHNICAL FIELD

The present invention relates to a laminated packaging material for a configurationally stable, liquid-tight packaging container possessing superior oxygen gas barrier properties, the packaging material having a
10 configurationally rigid but foldable core layer of paper or paperboard and a layer of polyvinyl alcohol applied on one side of the core layer and acting as oxygen gas barrier. The present invention further relates to a method of producing the laminated packaging material, as well as to configurationally stable, liquid-tight packaging containers possessing superior oxygen gas
15 barrier properties, and being produced by fold forming of a sheet or a web of the laminated packaging material.

BACKGROUND ART

It is previously known in the art to pack and transport liquid foods in
20 configurationally stable, liquid-tight packaging containers of a laminated packaging material. Such so-called packaging laminates comprise a plurality of separate layers which together contribute to imparting to the finished package the desired mechanical and chemical protective properties for the packed product. A conventional packaging laminate has a configurationally
25 rigid but foldable core layer of paper or paperboard which is coated on both sides with outer layers of plastic, preferably polyethylene, in order to protect the moisture-sensitive core layer and at the same time render the packaging laminate heat-sealable.

A packaging laminate with layers solely of paper or paperboard and
30 plastic of the type described above makes possible the production of configurationally stable, liquid-tight packaging containers, but lacks tightness properties in respect of oxygen gas and other gases and must, therefore, be supplemented with one or more additional layers (so-called barrier layers) of material possessing gas tightness properties, in order to
35 make the packaging laminate usable for packaging containers for oxygen gas sensitive products as well.

From Swedish Patent No. 440 519, it is previously known to supplement the above-described packaging laminate, for the purpose of rendering it oxygen gas tight, with a layer of polyvinyl alcohol which constitutes one of many other known examples of materials possessing superior oxygen gas barrier properties. According to Swedish Patent No, 440 519, a thin layer of an aqueous polyvinyl alcohol emulsion is applied by coating or similar covering operation direct onto the one surface of the paper or paperboard layer, whereafter the applied aqueous polyvinyl alcohol layer is dried for the formation of a continuous polyvinyl alcohol layer which covers the entire surface of one side of the paper or paperboard layer.

In order to prevent exaggerated penetration of the aqueous polyvinyl alcohol layer into the liquid-absorbent paper or paperboard layer, the aqueous polyvinyl alcohol emulsion should, according to Swedish Patent No. 440 519, also contain a thickening agent (e.g. Alginate) which aids in increasing the viscosity of the aqueous emulsion such that the penetrative powers of the aqueous emulsion into the subjacent paper or paperboard layer is greatly impeded. Since the oxygen gas tightness properties of the polyvinyl alcohol are highly dependent upon the moisture content of the polyvinyl alcohol and rapidly deteriorate in increasing moisture contents, the dried polyvinyl alcohol layer is protected with the aid of an outer liquid-tight plastic coating which is applied onto the side of the polyvinyl alcohol layer facing away from the paper or paperboard layer.

The packaging laminate according to Swedish Patent No. 440 519 suffers from serious shortcomings and drawbacks, which are intimately related not only to the moisture-sensitive oxygen gas tightness properties of the polyvinyl alcohol, but also to the physical and chemical surface nature of the paper or paperboard layer.

Because of the fibre structure of the paper or paperboard, respectively, a paper or paperboard surface is not entirely smooth, but has an inherent coarseness and surface unevenness. It is therefore necessary, in the method according to Swedish Patent No. 440 519, to apply the aqueous polyvinyl alcohol in larger quantities than would otherwise be required if the coating surface were entirely smooth, in order to "fill out" unevenness in the coarse fibre surface and thereby ensure that the applied layer becomes continuous and well-integrated. This excessive, but necessary coating

quantity of polyvinyl alcohol entails undesirable but unavoidable raised material and production costs for the packaging laminate.

Given that the coated paper or paperboard is also dried in connection with drying of the applied aqueous polyvinyl alcohol layer, the risk is
5 furthermore imminent that undesired so-called curling (with consequential risk of crack formation in the polyvinyl alcohol layer) occurs in the paper or paperboard layer, respectively, because of the excessive, difficultly regulated dryness in this layer.

Since the polyvinyl alcohol layer is moreover in direct contact with
10 the subjacent, moisture-sensitive paper or paperboard layer, it speaks for itself that the polyvinyl alcohol layer in the prior art packaging laminate according to Swedish Patent No. 440 519 is hazardously exposed to penetration by moisture and wet which is easily absorbed by and transferred from the paper or paperboard layer, respectively, in the event of the leakage
15 of moisture or wet from the other side of the paper or paperboard layer, respectively, facing away from the polyvinyl alcohol layer.

OBJECTS OF THE INVENTION

One object of the present invention is therefore to obviate these
20 drawbacks and shortcomings which are intimately associated with the above-described prior art packaging laminate.

A further object of the present invention is to realise a packaging laminate of the type disclosed by way of introduction without the use of excessive quantities of polyvinyl alcohol in order to achieve the well-
25 integrated packaging laminate possessing the desired, superior oxygen gas tightness properties.

Yet a further object of the present invention is to realise a packaging laminate comprising an oxygen gas barrier layer of polyvinyl alcohol in which the polyvinyl alcohol layer is well protected against penetration by
30 moisture and wet.

SOLUTION

These objects will be attained according to the present invention by means of a packaging laminate possessing the characterizing features as set
35 forth in the characterizing clause of appended Claim 1. Expedient and preferred embodiments of the packaging laminate according to the present

invention have further been given the characterizing features as set forth in appended subclaims 2 to 6.

With the aid of the liquid-tight plastic layer applied between the core layer and the polyvinyl alcohol layer in the packaging laminate according to the present invention, there will thus be created a moisture barrier which effectively protects the polyvinyl alcohol layer from any possible penetration by moisture and wet from the liquid-absorbing core layer. The interjacent plastic layer also contributes in "filling out" unevenness in the coarse surface structure of the core layer, whereby a smoother subjacent surface will be achieved for the polyvinyl alcohol layer which may thereby be applied in smaller, but just as effective quantities as in the above-discussed prior art packaging laminate, in order to achieve the desired, regulated and unitary oxygen gas barrier properties in the finished packaging laminate.

The choice of plastic in the interjacent plastic layer is not critical according to the present invention, even though it has proved that an extrudable thermoplastic is at present the most highly preferred plastic in this layer. Preferably, the plastic consists of polyethylene which is well-compatible with polyvinyl alcohol and creates a good moisture barrier, at the same time as it effectively bonds to both the core layer and to the above-considered polyvinyl alcohol layer.

In order to protect the applied polyvinyl alcohol layer from penetration of moisture and wet also from the other side of the polyvinyl alcohol layer facing away from the core layer, it is appropriate according to the invention also to cover this side of the polyvinyl alcohol layer with a layer of plastic, whereby the polyvinyl alcohol layer in the finished packaging laminate lies well encapsulated and concealed between the two surrounding plastic layers which effectively protect the polyvinyl alcohol layer from oxygen gas tightness reducing penetration by moisture and wet from both sides of the polyvinyl alcohol layer.

Nor is the choice of plastic in this plastic layer covering the other side of the polyvinyl alcohol layer critical according to the present invention. Suitable plastics may, according to the present invention, be thermoplastics such as, for example, polyethylene which satisfies the moisture barrier requirement and which bonds with good adhesive strength to polyvinyl alcohol.

According to another aspect of the present invention, a simple and efficient method of producing the laminated packaging material according to the invention is realised.

5 The method according to the present invention has been given the characterizing features as set forth in appended Claim 7. Expedient and practical embodiments of the method according to the present invention have further been given the characterizing features as set forth in appended subclaims 8 to 13.

10 A major advantage which is afforded by the method according to the present invention as compared with the prior art method as disclosed above according to Swedish Patent No. 440 519 is that the drying (adjustment of moisture content) of the aqueous polyvinyl alcohol layer applied via the interjacent plastic layer is carried out without the risk of undesired so-called curling (with the consequential risk of crack formation and loss of tightness).

15 Furthermore, in the method according to the present invention, it is, as was pointed out above, possible to produce a well-integrated packaging laminate of the described type possessing the desired superior oxygen gas tightness properties employing considerably smaller quantities (approximately 50 per cent less) of polyvinyl alcohol than in the known
20 method as disclosed in Swedish Patent No. 440 519.

According to yet a further aspect of the present invention, there will further be realised a configurationally stable packaging container possessing superior oxygen gas barrier properties of the type which, in a conventional manner, is produced by fold formation of a sheet or web-shaped packaging
25 laminate according to the present invention which is preferably provided with decorative artwork and crease lines.

BRIEF DESCRIPTION OF THE ACCOMPANYING DRAWINGS

30 The present invention will now be described in greater detail hereinbelow, with the aid of preferred embodiments of both the laminated packaging material and the method of its production, with reference to the accompanying Drawings, in which:

Fig. 1 schematically shows a cross section of a laminated packaging material according to the present invention;

35 Fig. 2 schematically illustrates a method of producing the laminated packaging material according to the present invention; and

Fig. 3 schematically illustrates the upper portion of a conventional, configurationally stable packaging container which has been produced by fold forming of a web-shaped laminated packaging material according to the present invention.

5

DESCRIPTION OF PREFERRED EMBODIMENTS

Fig. 1 thus schematically illustrates a cross section of a laminated packaging material (packaging laminate) according to the invention which carries the generic reference numeral 10. The packaging laminate 10 has a configurationally rigid, but foldable core layer of paper or paperboard 11, as well as outer liquid-tight plastic layers 12 and 13 of which the outer layer 12 (the uppermost in Fig. 1) is disposed on that side of the packaging laminate 10 which is intended to be turned to face outwards in a packaging container produced from the packaging laminate, while the outer layer 13 (the lowermost in Fig. 1) is correspondingly disposed on that side of the packaging laminate which is intended to be turned to face inwards in a packaging container produced from the packaging laminate.

The outer (uppermost) plastic layer 12 preferably consists of polyethylene, for example low density polyethylene (LDPE), which, on the one hand, affords protection to the packaging laminate 10 against the penetration of moisture and wet from the "outside" of the packaging laminate, and, on the other hand, renders the packaging laminate sealable by conventional, so-called heat sealing according to which mutually facing plastic layers may, by the supply of heat and pressure, effectively be united to one another by surface fusion for the formation of mechanically strong, liquid-tight sealing joints during conversion of the packaging laminate 10 into packaging containers. While not being germane to the present invention (and therefore not shown on the Drawings), it should be pointed out that the outer plastic layer 12 may, in addition, be provided with suitable printing ink patterns of a decorative and/or informative nature (so-called decorative artwork) in order to identify, for example, a packed product.

The other outer (lowermost) plastic layer 13 also preferably consists of polyethylene, for example low density polyethylene (LDPE) which, in a corresponding manner, affords the packaging laminate 10 protection against penetration by moisture and wet from the "inside" of the packaging laminate and at the same time makes the packaging laminate sealable by conventional

so-called heat sealing by means of which the inside of the packaging laminate may be united to the outside of the packaging laminate in mechanically strong, liquid-tight sealing joints during conversion of the packaging laminate 10 into packaging containers.

5 Between the core layer 11 and the second outer (lowermost) plastic layer 13, the packaging laminate 10 has a layer of polyvinyl alcohol 14 which serves as oxygen gas barrier layer and which is bonded to the core layer 11 via a sealing layer 15 applied between the core layer 11 and the polyvinyl alcohol layer 14. The sealing layer 15 preferably consists of an extrudable
10 thermoplastic, for example polyethylene, which bonds with good adhesive strength both to the core layer 11 and to the polyvinyl alcohol layer 14, at the same time as the sealing layer 15 gives the moisture and wet-sensitive polyvinyl alcohol layer 14 good protection against penetration of moisture and wet from the outside of the packaging laminate 10. The sealing layer 15,
15 which is in direct contact with the core layer 11, also fills out inherent unevenness in the coarse surface structure of the core layer and forms a smooth subjacent surface for the polyvinyl alcohol layer 14.

The essential feature in the packaging laminate 10 according to the present invention is, as shown in Fig. 1, that the moisture and wet-sensitive
20 oxygen gas barrier layer of polyvinyl alcohol 14 lies well encapsulated and concealed between surrounding, liquid-tight plastic layers 15 and 13 and thereby runs no risk of losing its oxygen gas tightness properties because of the penetration of moisture and wet from the outside and/or inside of the packaging laminate.

25 Fig. 2 schematically illustrates a method according to the present invention for producing the above-described packaging laminate 10. For the purposes of clarity, the same reference numerals as in Fig. 1 have been employed to designate the same or corresponding details in Fig. 2.

A web of paper or paperboard 11 which, on its one side, is coated
30 with a layer of plastic 12 as shown on enlarged scale in the encircled region A to the left in Fig. 2, is led through the nip between two rotating rollers 16, 16, at the same time as the other (uncoated) side of the web is coated with a layer of plastic 15 which is extruded on the web by means of an extruder 17. The now double-side coated web of paper or paperboard (see the enlarged
35 cross section in encircled region B) is led further to a surface treatment station at 18 where the applied plastic layer 15 is subjected to an adhesion-

improving surface treatment, for example a corona treatment, with the aid of a suitable surface treatment device 19, for example a corona device.

5 The surface treated web is led further to a coating or covering station at 20 where an aqueous emulsion of polyvinyl alcohol is applied in the form of a thin aqueous layer on the web's surface treated plastic layer 15 by means of a suitable coating or application apparatus 21 for the formation of the cross sectional structure illustrated on an enlarged scale in the encircled region C.

10 The polyvinyl alcohol-coated web is led further to a drying station at 21 where the moisture content in the aqueous polyvinyl alcohol layer 14 is adjusted by the removal or vaporisation of water with the aid of a suitable drying apparatus 22.

15 Finally, the web with the moisture content adjusted polyvinyl alcohol layer 14 is led through the nip between two rotating rollers 23 at the same time as one (or possibly more) layer of molten plastic 13 is applied to the polyvinyl alcohol layer 14 with the aid of an extruder 24 for the formation of the finished packaging laminate 10 displaying the cross sectional structure shown on an enlarged scale in the encircled region D.

20 From a sheet or web-shaped packaging laminate 10 according to the invention, configurationally stable, liquid-tight packaging containers 25 possessing superior oxygen gas tightness properties may be produced by fold formation in a per se known manner. One example of such a conventional packaging container is schematically illustrated in Fig. 3.

25 Fig. 3 shows the upper portion of a known packaging container 25 of the Tetra Brik® type, which is produced with the aid of modern, rational packaging machines of the type that form, fill and seal packages from a web-shaped, preferably creased and decorated packaging laminate. Since such packaging containers as well as the method of producing them are well known to persons skilled in the art, it is superfluous to describe them in
30 greater detail here. However, the principle is that the web-shaped packaging laminate is first reformed into a tube which is filled with the desired contents, in this case an oxygen gas sensitive product, and is thereafter divided into closed, cushion-shaped packages by repeated transverse seals of the tube below the current level of the contents in the tube. The packages are
35 separated from one another by incisions in the transverse sealing zones and are given the desired final geometric configuration, normally

parallelepipedic, as shown in Fig. 3, by a final fold formation and sealing operation.

5 It will thus have been apparent from the foregoing that the present invention effectively obviates the previously discussed shortcomings and drawbacks inherent in the prior art technique, and, in a simple manner and employing conventional technology and equipment, makes possible the production of a laminated packaging material for configurationally stable, liquid-tight packaging containers possessing superior oxygen gas tightness properties. While the present invention has been described above with
10 reference to certain preferred embodiments of both the packaging laminate proper and the method by which it is produced, it should be observed that the present invention is not restricted exclusively to these embodiments, which have been specifically presented and described in order to illustrate the present invention. It will be obvious to a person skilled in the art that
15 numerous variations and modifications are possible without departing from the spirit and scope of the inventive concept as this is defined in the appended Claims.

WHAT IS CLAIMED IS:

1. A laminated packaging material for a configurationally stable, liquid-tight packaging container possessing superior oxygen gas barrier properties,
5 said packaging material having a configurationally rigid but foldable core layer of paper or paperboard (11), and a layer of polyvinyl alcohol (14) applied as oxygen gas barrier on one side of the core layer, characterized in that the polyvinyl alcohol layer (14) is bonded to the core layer (11) by a layer of plastic (15) applied between the polyvinyl alcohol layer and the core layer.
10
2. The laminated packaging material as claimed in Claim 1, characterized in that the plastic layer (15) between the core layer (11) and the polyvinyl alcohol layer (14) consists of a thermoplastic.
15
3. The laminated packaging material as claimed in Claim 1 or 2, characterized in that the plastic layer (15) between the core layer (11) and the polyvinyl alcohol layer (14) consists of polyethylene.
- 20 4. The laminated packaging material as claimed in any of the preceding Claims, characterized in that the other side of the polyvinyl alcohol layer (14) facing away from the core layer (11) is covered by a layer of plastic (13) applied on the polyvinyl alcohol layer.
- 25 5. The laminated packaging material as claimed in Claim 4, characterized in that the plastic layer (13) on said other side of the polyvinyl alcohol layer (14) consists of a thermoplastic.
- 30 6. The laminated packaging material as claimed in Claim 5, characterized in that the plastic layer (13) on said other side of the polyvinyl alcohol layer (14) consists of polyethylene.
7. A method of producing a laminated packaging material as claimed in Claim 1, characterized in that a web of paper or paperboard (11) is coated on its one side with a layer of plastic (15); that the coated side of the web is coated with a layer of aqueous polyvinyl alcohol (14) which thereafter, for
35

the purposes of adjustment of moisture content, is dried for the removal or vaporisation of water; and that the moisture content adjusted or dried polyvinyl alcohol layer (14) of the web is coated with an outer layer of plastic (13).

5

8. The method as claimed in Claim 7, characterized in that the thin aqueous polyvinyl alcohol layer (14) is applied on the plastic film by a coating operation.

10

9. The method as claimed in Claim 7 or 8, characterized in that the thin aqueous polyvinyl alcohol layer (14) is applied on the plastic film in a quantity of approximately 10 g/m².

15

10. The method as claimed in any of Claims 7 to 9, characterized in that the plastic film (15) is subjected to an oxidising surface treatment prior to application of the thin aqueous polyvinyl alcohol layer (14).


20

11. The method as claimed in Claim 10, characterized in that the oxidising surface treatment is a corona treatment.

12. The method as claimed in any of Claims 7 to 11, characterized in that the plastic layer (15) is applied by extrusion.


25

13. A configurationally stable, liquid tight packaging container (25) possessing superior oxygen gas barrier properties, characterized in that it is produced by fold formation of a sheet or web-shaped, laminated packaging material (10) according to any of Claims 1 to 6.

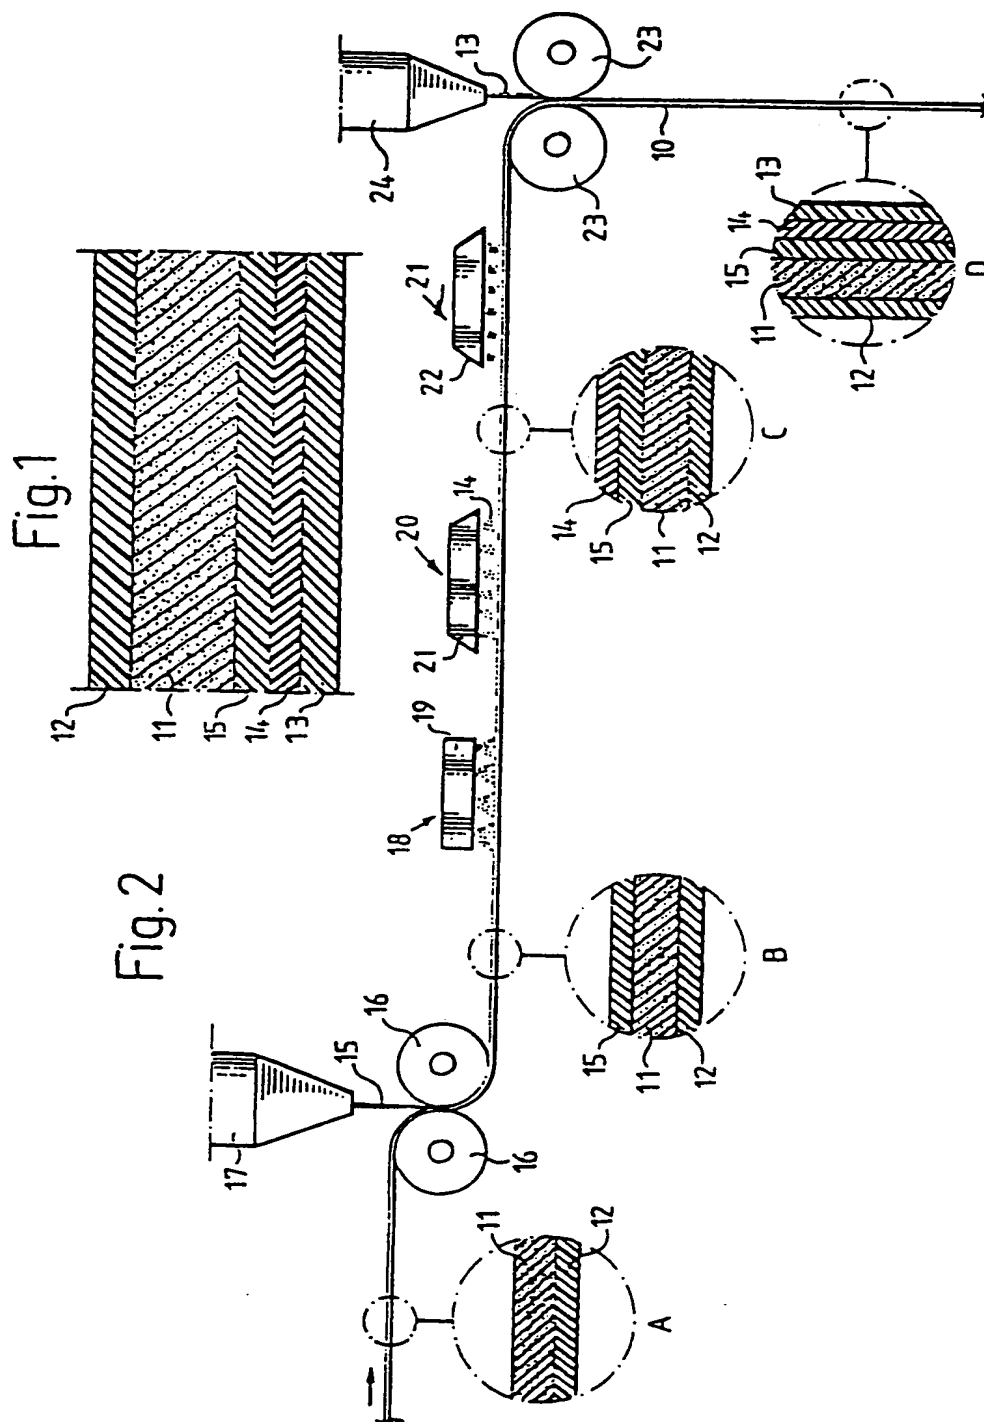

2/2

Fig.3

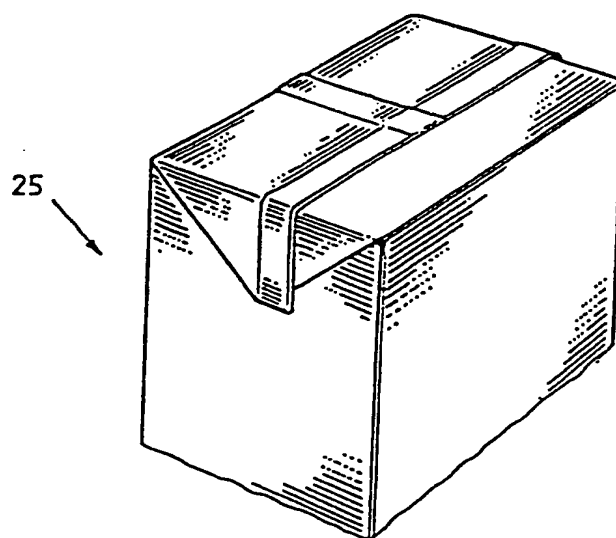

INTERNATIONAL SEARCH REPORT

Internati nal applicati n No.

PCT/SE 96/01237

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: B32B 27/10, B65D 65/40

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: B32B, B65D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0085919 A1 (TETRA PAK INTERNATIONAL AB), 17 August 1983 (17.08.83), abstract --	1-13
A	EP 0293098 A2 (INTERNATIONAL PAPER COMPANY), 30 November 1988 (30.11.88), page 5, line 27 - line 34, figure 6 --	1-13
A	GB 2115770 A (TRANSPARENT PAPER PLC.), 14 Sept 1983 (14.09.83), page 2, line 18 - line 25; page 2, line 34 - line 51, claim 3 -----	1-13



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

20 January 1997

Date of mailing of the international search report

23 -01- 1997

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Jack Hedlund

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

Information on patent family members

28/10/96

International application No.

PCT/SE 96/01237

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A1- 0085919	17/08/83	SE-T3- 0085919	
		AU-B- 554561	28/08/86
		AU-A- 1132283	18/08/83
		CA-A- 1199536	21/01/86
		GB-A- 2114468	24/08/83
		JP-B- 6011960	16/02/94
		JP-A- 58156096	16/09/83
		SE-B,C- 440519	05/08/85
		SE-A- 8200761	11/08/83
		US-A- 4460425	17/07/84
EP-A2- 0293098	30/11/88	SE-T3- 0293098	
		AT-T- 118734	15/03/95
		AU-B- 611154	06/06/91
		AU-A- 1672988	01/12/88
		CA-A- 1326645	01/02/94
		DE-D,T- 3853099	14/06/95
		ES-T- 2072861	01/08/95
		FI-B- 89567	15/07/93
		JP-A- 63312143	20/12/88
		KR-B- 9512792	21/10/95
		NO-B,C- 177562	03/07/95
		US-E- RE33376	09/10/90
		US-A- 4789575	06/12/88
		US-A- 4802943	07/02/89
		ZA-A- 8802901	27/10/88
GB-A- 2115770	14/09/83	NONE	

THIS PAGE BLANK (USPTO)